
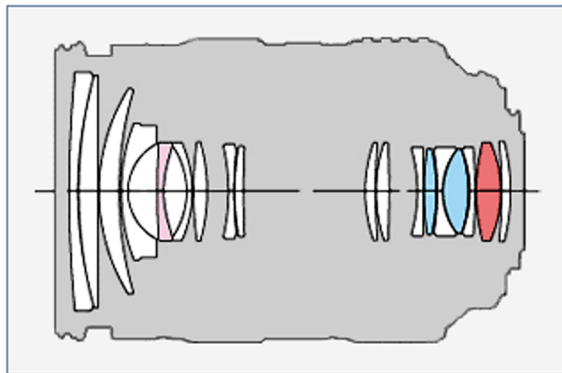


## Specifications ZD 14-35mm/f2.0


Focal Length	14-35mm (35mm equivalent focal length 28-70mm)
Lens construction	18 Elements in 17 Groups. 2 ED lenses, Aspherical ED lens and Aspherical lens
Dust & Drip Proof	Yes
Focusing System	Floating & Internal Focusing System
Angle of View	75-34 Degree
Closest Focusing Distance	0.35m
Maximum Image Magnification	0.12x (35mm equivalent Max. Image Magnification 0.24x)
Minimum Field Size	149x111mm
Number of Blades	9 (Circular Aperture Diaphragm)
Maximum Aperture	f 2
Minimum Aperture	f 22
Filter Size	Diameter 77mm
Dimension	Diameter 86x123mm
Weight	900g
Compatibility	Yes (AF/MF available)
Tele Converter	EC-14
Tele Converter	EC-20
Extension Tube	EX-25
Box Contents	Lens Cap(LC-77), Lens Rear Cap(LR-1), Lens Hood(LH-82B), Lens Case(LSC-1122), Instruction Manual, Olympus Worldwide Warranty Card

## Depth of Field Table

	<u>WIDE : 14mm</u>	<u>MIDDLE : 22mm</u>	<u>TELE : 35mm</u>						
Camera-to-subject distance (in meters)									
F	0.35	0.4	0.5	0.7	1.0	2.0	3.0	5.0	inf.
Stop 2	0.342~	0.388~	0.479~	0.651~	0.890~	1.554~	2.068~	2.811~	6.094~
	0.358	0.413	0.524	0.759	1.147	2.854	5.667	26.851	inf.
2.8	0.339~	0.384~	0.471~	0.634~	0.855~	1.434~	1.852~	2.414~	4.431~
	0.362	0.418	0.534	0.786	1.219	3.440	8.785	inf.	inf.
4	0.335~	0.378~	0.461~	0.611~	0.808~	1.289~	1.608~	2.003~	3.174~
	0.367	0.426	0.550	0.829	1.346	4.988	52.495	inf.	inf.
5.6	0.330~	0.370~	0.447~	0.582~	0.751~	1.132~	1.361~	1.623~	2.283~
	0.375	0.438	0.575	0.902	1.586	14.619	inf.	inf.	inf.
8	0.323~	0.360~	0.429~	0.547~	0.686~	0.971~	1.126~	1.291~	1.655~
	0.387	0.457	0.616	1.035	2.150	inf.	inf.	inf.	inf.
11	0.313~	0.347~	0.407~	0.505~	0.614~	0.815~	0.915~	1.014~	1.210~
	0.406	0.489	0.690	1.328	4.614	inf.	inf.	inf.	inf.
16	0.301~	0.330~	0.381~	0.459~	0.539~	0.674~	0.734~	0.791~	0.895~
	0.439	0.547	0.842	2.344	inf.	inf.	inf.	inf.	inf.
22	0.287~	0.311~	0.352~	0.410~	0.466~	0.551~	0.586~	0.618~	0.672~
	0.502	0.669	1.288	inf.	inf.	inf.	inf.	inf.	inf.



**[14mm F2.0]**

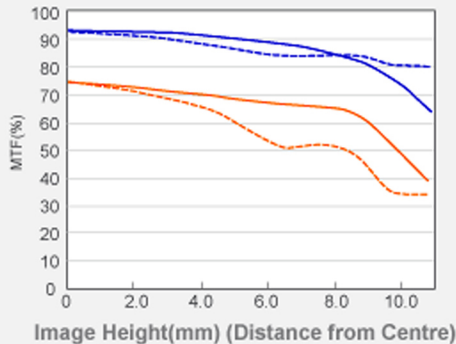

**[35mm F2.0]**

